

# Havana Stone

12x24 Glazed Porcelain




75HAVBEI1224




75HAVWHI1224




75HAVLIG1224

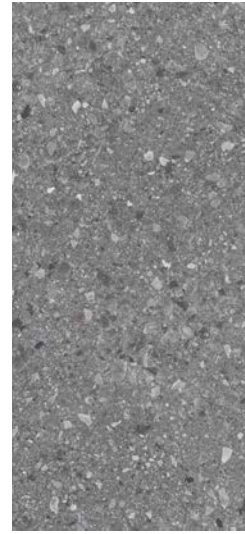

75HAVDAR1224



2x2 Mosaic




3" Hexagon



3D Hexagon



4" Craft Hexagon



Sphere



Tile: 12x24 - 24x24 - 24x48 - \* 36x36

Mosaics: 2x2 - 3" Hexagon - 3D Hexagon  
- 4" Craft Hexagon - Sphere

Trim: 4x12 Bullnose

\* Coming soon

For more information  
and images:



# Havana Stone

Glazed Porcelain



## Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648-04	≥ 425 lbs.
Chemical Resistance	ASTM C650-04	Class A
Abrasion Resistance	ASTM C1027	Class IV
Frost Resistance	ASTM C1026	Resistant
Thermal Shock Resistance	ASTM C484	Resistant
Scratch Hardness	MOH'S	7
Water Absorption	ASTM C373-16	≤ 0.5%
DCOF (Wet)	ANSI A326.3	≥ 0.42

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.81" x 23.62"	9.0 mm	Matte	Yes
24" x 24"	23.62" x 23.62"	9.0 mm	Matte	Yes
24" x 48"	23.62" x 47.24"	9.0 mm	Matte	Yes
36" x 36"	35.43" x 35.43"	9.0 mm	Matte	Yes
2" x 2" Mosaic	11.81" x 11.81"	9.0 mm	Matte	Yes
3" Hexagon Mosaic	10.25" x 11.81"	9.0 mm	Matte	Yes
3D Hexagon Mosaic	9.45" x 11.02"	9.0 mm	Matte	Yes
4" Craft Hexagon Mosaic	13.6" x 11.81"	9.0 mm	Matte	Yes
Sphere Mosaic	14.02" x 13.07"	9.0 mm	Matte	Yes
4" x 12" Bullnose	4.0" x 11.75"	9.0 mm	Matte	Yes

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.