Urban Living Porcelain













Urban Living Porcelain



Technical Characteristics


Specs	Test Method	Industry Standard	Test Result				
Water Absorption	ASTM C373	≤ 0.5%	≤ 0.4%				
Surface Wear Resistance	ANSI A137.1	Surface wear resistance properties of glazed vitreous and porcelain tile.	All Commercial / Residential				
Chemical Resistance	ASTM C650	No tile sample shows visible defects after continuous contact with a variety of chemicals for 24 hours.	Not Affected				
DCOF (Wet)	ANSI A326.3	≥ 0.42	≥ 0.42				
Stain Resistance	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures.	Not Affected				
Breaking Strength	ASTM C648	≥ 250 lbf	≥ 300 lbf (8 mm); ≥ 400 lbf (10 mm)				
Freeze Resistance	ASTM C1026	No tile sample shows visible defects after repeated processes of freezing and thawing.	Resistant				
Warpage Edge	ASTM C485	+ 0.40% or + 0.05 in (+ 1.9 mm)	± 0.40%	Rectified			
		± 0.40% or ± 0.05 in (± 1.8 mm)	± 0.50%	Calibrated			
Warpage Diagonal	ASTM C485	± 0.40% or ± 0.07 in (± 1.8 mm)	± 0.40%	Rectified			
			± 0.50%	Calibrated			
Wedging	ASTM C502	± 0.25% or ± 0.03 in (± 0.8 mm)	± 0.25%	Rectified			
		± 0.20 /0 01 ± 0.00 III (± 0.0 IIIII)	± 0.50%	Calibrated			
Thickness	ASTM C499	Range: ± 0.04 in	≤ 0.04 in				
Recycled Content		As reported	≥ 30% Pre-Consumer				

Nominal Size	Actual Size	Thickness	Finish	Rectified
3" x 12"	2.95" x 11.81"	8 mm	Glossy	-
6" x 24"	5.91" x 23.62"	8 mm	Glossy	-
12" x 12"	11.81" x 11.81"	8 mm	Matte or Raw	Yes
12" x 24"	11.81" x 23.62"	8 mm	Matte, Raw, or Chiseled	Yes
24" x 24"	23.62" x 23.62"	8 mm	Matte or Raw	Yes
24" x 48"	23.62" x 47.24"	8 mm	Matte, Raw, or Chiseled	Yes
2" x 2" Mosaic	11.81" x 11.81"	8 mm	Matte or Raw	-
3" x 12" Bullnose	2.95" x 11.81"	8 mm	Matte	-
6" x 24" Bullnose	5.91" x 23.62"	8 mm	Glossy	-
6" x 12" Cove Base *	5.91" x 11.81"	7 mm	Matte	-

^{*} This item is made to order. Please check with a sales representative for current lead times.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.



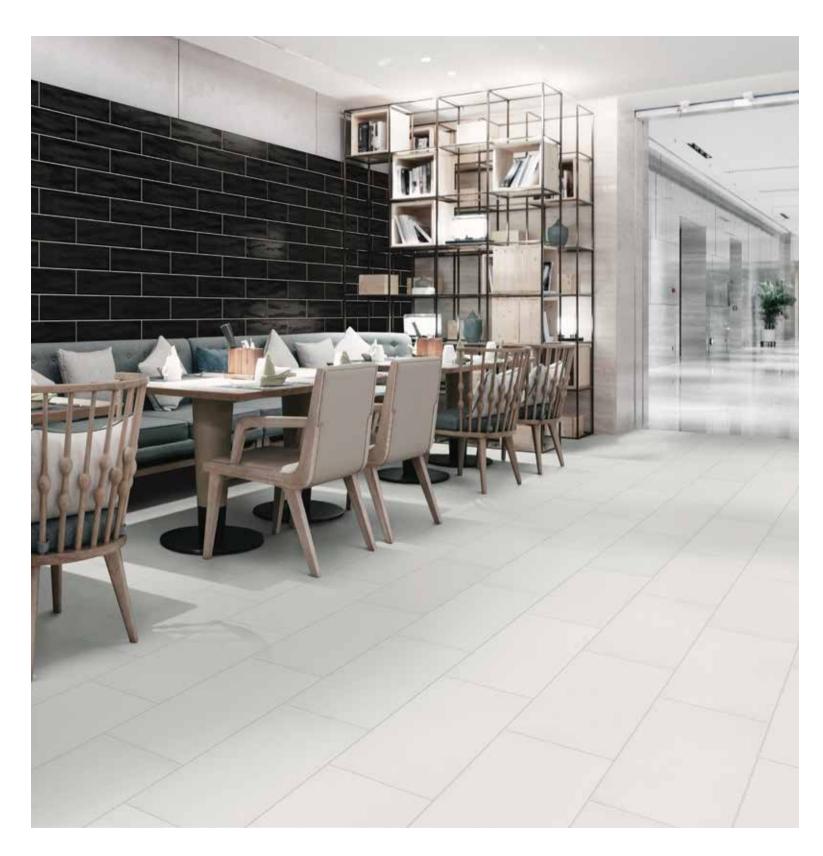

12x24 Color Body Porcelain

04URLMIS1224 (matte)

04URLMIS1224C (chiseled)

04URLMIS1224R (raw)



04URLTIT1224 (matte)

04URLTIT1224C (chiseled)


04URLTIT1224R (raw)

04URLMET1224 (matte)

04URLMET1224C (chiseled)

04URLMET1224R (raw)

6x24 Glossy Porcelain

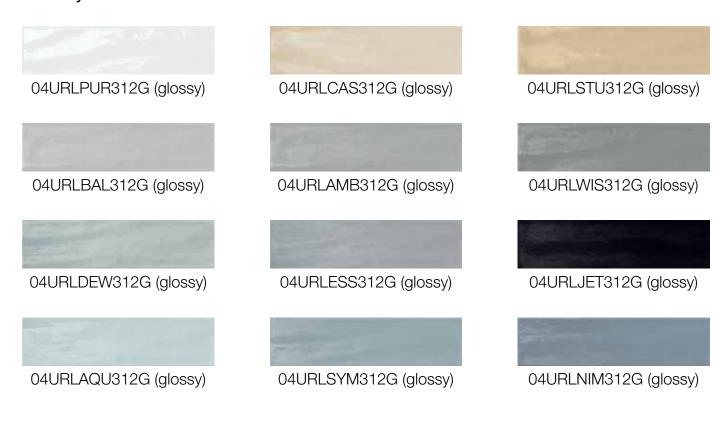

3x12 - 6x24

6x24 Bullnose

N/A





Tile:

Trim:

Mosaic:





Chiseled finish

Raw finish

12x12 - 12x24 - 24x24 - 24x48 Tile:

2x2 Mosaic:

3x12 Bullnose - 6x12 Cove Base Trim: Not all colors available in all sizes or finishes